



TRADE PLUMBING & HARDWARE




Sealants
Accessories
Foam fillers
Pvc solvent Cements & primers
PVA Adhesives & Electrical
Paints
Timber Preservatives
Landscaping and Garden

**TRADIES
TRUST**



PLUMBING SEALANTS

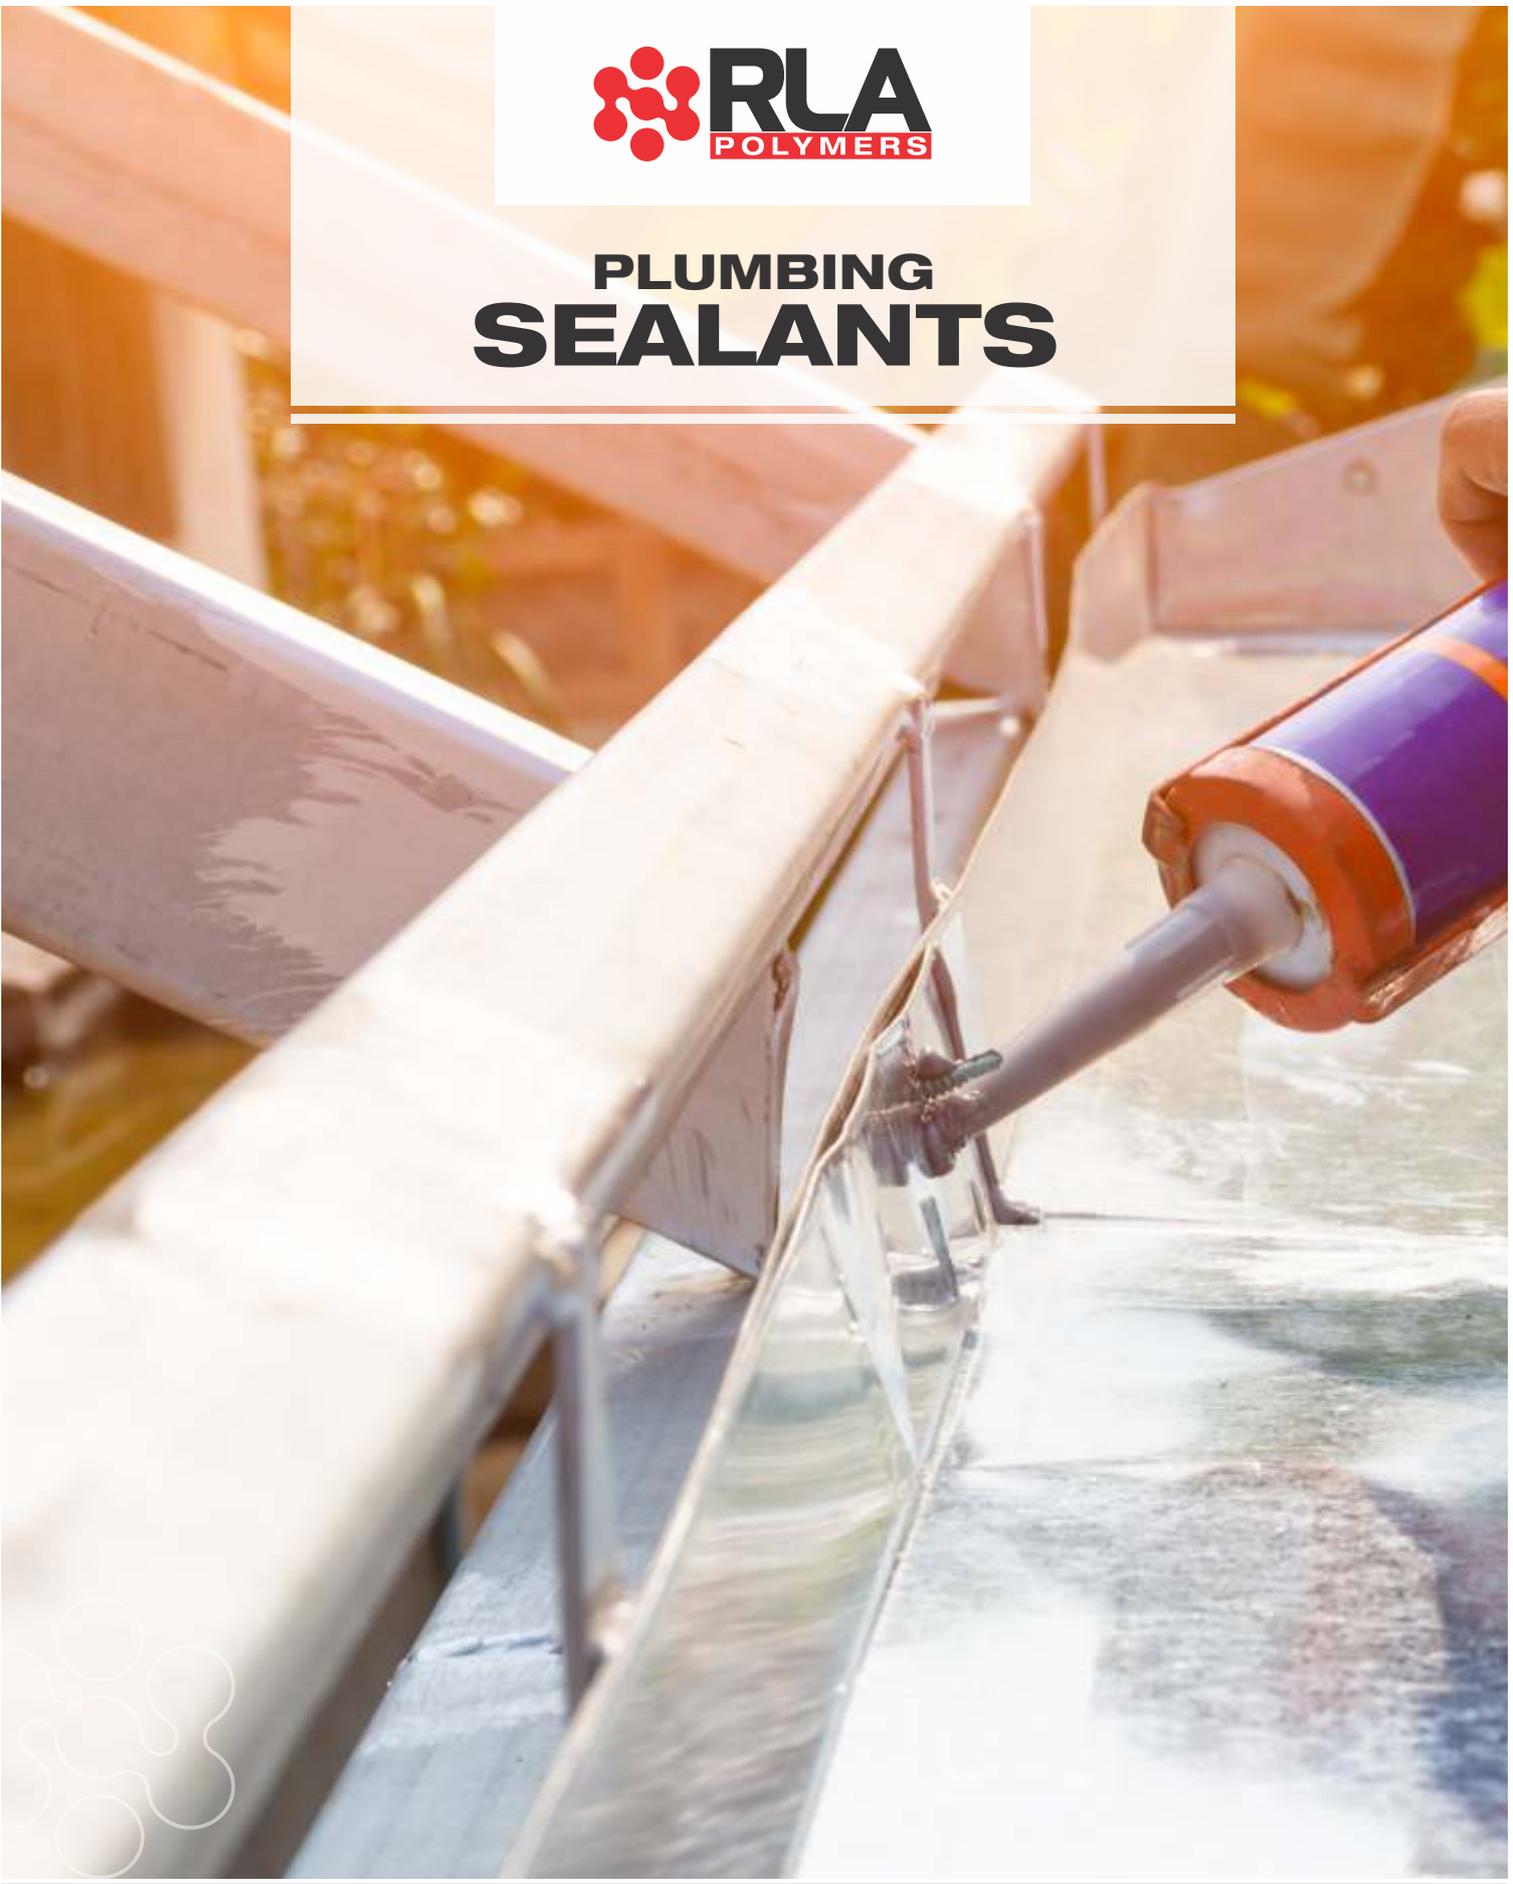

Silicones
MS Hybrid
Gap Fillers

**TRADIES
TRUST**



Roof & Gutter Silicone Sealant

High performance sealant for roofing applications

A premium quality silicone providing a waterproof seal with excellent adhesion to metal roofing, brick, concrete glass and some plastics.

ADVANTAGES

- AS4020 Approved
- UV Stable
- Mould & fungal resistant
- ± 25% flexible
- Neutral curing

USES

- Metal sheeting
- Guttering
- Internal / External

QUICK REF GUIDE

- Colour **Grey/White/Blk/Trans**
 Area **Internal / External**
 Size **300ml Cartridge**
 Code **Trans - 610324**
White - 610326
Grey - 610319
Black - 610327



Wet Area Silicone Sealant

High performance sealant for wet area applications

A premium quality silicone providing a waterproof seal with excellent adhesion to most common substrates

ADVANTAGES

- UV Stable
- Mould & fungal resistant
- ± 25% flexible
- Non corrosive
- Neutral curing

USES

- Bathrooms
- Kitchens
- Internal / External

QUICK REF GUIDE

- Colour **Trans / White**
 Area **Internal / External**
 Dry Time **24 hrs**
 Size **300ml Cartridge**
 Code **Trans - 610316**
White - 610318
GP Off White - 610370



Gap Filler

Acrylic gap filler

Gap Filler is a general purpose acrylic mastic painters caulk. Gap Filler is a fast drying, flexible and easily coated filler and is ideal for low movement joints and gaps prior to painting.

ADVANTAGES

- Paintable
- Sandable

USES

- Caulking
- Filling gaps

QUICK REF GUIDE

- Colour **White**
 Area **Internal / External**
 Dry Time **24 hrs**
 Size **300ml Cartridge**
 Code **600395**

Acrylic



PanelMastic

Coolroom panels

Aftek Panel Mastic is a low odour, non skinning coolroom mastic that is used for sealing joints in coolroom construction. Panel Mastic is taint free and has good slump resistance and can withstand low coolroom temperatures.

ADVANTAGES

- Low Temperature applications
- Permanently flexible
- Strong bond

USES

- Coolroom panels

QUICK REF GUIDE

- Colour **White**
 Area **Internal / External**
 Tack Free **Non skinning/drying**
 Size **300mL Cartridge**
 Code **600144**

Mastic



UltraGrip

Construction adhesive

UltraGrip Construction Adhesive is a quality synthetic rubber adhesive for the fixing of flooring sheets and wall panelling. UltraGrip tolerates moisture in timber components. Bonds to most commonly used building materials. Suitable for polystyrene.

ADVANTAGES

- Very easy to use
- High strength

USES

- Suitable for polystyrene.
- Bonds to most building material

QUICK REF GUIDE

Colour	Brownish
Area	Internal/External
Tack Free Time	5-10 Minutes
Size- Code	300mL - 900083 850mL - 900033



UltraGrip Premium

Premium adhesive

UltraGrip Premium Construction Adhesive is a high quality synthetic rubber adhesive. This product has been formulated to resist stiffening in cold weather & tolerates moisture in damp timbers. Bonds to most commonly used building materials. Not suitable for polystyrene.

ADVANTAGES

- Good low temperature handling
- High Strength
- Good gap filling properties

USES

- Not suitable for polystyrene.
- Bonds to most building material

QUICK REF GUIDE

Colour	Brown
Area	Internal/External
Tack Free Time	30 Minutes
Size- Code	300mL - 900073 850mL - 900090

SMP Adhesives & Sealants



FlexPro MS

Flexible multipurpose hybrid polymer sealant

FlexPro MS is a one-component sealant based on silane modified polymer, which is moisture cured sealant. It performs good adhesion to most substrates; It is suitable for most of common construction materials, especially to concrete, aluminum, mason, glass, etc. and it is compatible with most of paint systems.

ADVANTAGES

- Paintable
- High strength / Flexible
- Low VOC
- UV stable

USES

- Perimeter sealing around window and door frames
- Concrete expansion joints
- Sealing/bonding in the building & construction industry

QUICK REF GUIDE

Colour	Grey / Black
Area	Internal/External
Tack free	15 Minutes
Size- Code	Grey 600ml - 620620 Blk 600ml - 620621



FlexPro MS-HD

High performance hybrid polymer sealant/adhesive

FlexPro MS-HD is an industrial grade sealant which is based on MS polymer high performance, one part moisturecured, high strength and high modulus. Also, it has high green strength, ideally suitable for industrial application where needs to be fast bonding, higher movement or vibration- absorbed.

ADVANTAGES

- Paintable
- High Strength
- Highly flexible
- Low VOC
- UV stable
- High modulus

USES

- Elastic bonding in vibrating constructions
- Concrete expansion joints
- Sealing/bonding in the building & construction industry
- Body panel adhesive for transport industry ie: caravan, truck & trailers

QUICK REF GUIDE

Colour	Grey / Black / White
Area	Internal/External
Tack Free	30-40 Minutes
Size- Code	Blk 600ml - 620627 Grey 600ml - 620626 Whit 600ml - 620625



FlexPro PU

Polyurethane sealant

Flex-Pro Polyurethane Sealant is a one component high performance, Low modulus construction joint sealant. A moisture curing sealant with high mechanical strength & excellent resistance to weathering.

ADVANTAGES

- Class A
- Paintable
- Low VOC
- ± 25% Flexible

USES

- Construction joints
- Tilt panels

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Tack Free	1-2 Hours
Size- Code	600ml - 620542



FlexPro 50FC

Fast curing polyurethane sealant/adhesive

FlexPro 50FC is a one part fast cure polyurethane elastomeric sealant that cures via humidity in the air to form a flexible joint for weatherproofing. It has very good adhesion properties to most common building substrates.

ADVANTAGES

- Class A
- Paintable
- Low VOC
- ± 25% Flexible
- High adhesive strength

USES

- Construction joints
- Sealing perimeter joints
- Adhesive for bonding metal to concrete

QUICK REF GUIDE

Colour	Grey / Black / White
Area	Internal / External
Tack free	45 Minutes
Size- Code	Grey 600ml - A1255 Whi 600ml - A1256 BIK 600ml - A1257

Fire Rated Sealants



FirePro FR

Fire rated acrylic sealant

FirePro Fire Rated Intumescent Sealant is a water-based acrylic sealant suitable for use in internal and external expansion joints and for penetrations requiring a fire-resistant seal. FirePro expands when exposed to fire to form an inorganic plug in joints and voids, assisting in the prevention of fire transmission across partitions in a building.

ADVANTAGES

- No priming
- 4 hours fire rated
- Flexible

USES

- Concrete, plasterboard, blockwork, brick walls
- Building services' penetrations pipes, cable trays, conduit and ducts

QUICK REF GUIDE

Colour	Grey / White
Area	Internal / External
Tack free	30 Minutes
Size- Code	Grey - R6841-300mL Grey - R6841-600mL White - R6849-600mL



PLUMBING ACCESSORIES



Wipes
Caulking guns
Wax wraps

**TRADIES
TRUST**



Heavy Duty Caulking Gun

Premium grade caulking gun

Premium quality caulking gun for use with all 300mL and 850g cartridges

USES

- Silicones
- Constructions adhesives

SIZE | CODE

300mL - A1380
850mL - 770502



Sausage Gun

High performance barrel gun

Premium quality caulking gun for use with all 600mL sausages

USES

- Silicones
- Polyurethane

SIZE | CODE

600mL - 770501

Wax Wrap



Wax Wrap

Woven synthetic fabric tape

Wax Wrap is a Petrolatum impregnated, woven synthetic fabric tape. For the protection of copper, steel and cast iron pipe work in above and below grade applications. Each product is supplied as a 10 metre roll of Wax Wrap.

ADVANTAGES

- Protects
- Petrolatum protection

USES

- Copper
- Steel

SIZE | CODE

Size **50MM X 10M - 750002**
100MM X 10M -750004



Handy Wipes

Compostable & Biodegradable Fabric Wipes

Handy Wipes are waterless hand towels for removing tough grime and dirt. These towels have been especially formulated to quickly and effectively remove sealant, tar, dirt, grease, oil, adhesive, paint and ink from tools and equipment.

ADVANTAGES

- Convenient, easy tear off towels
- Won't scratch or mark
- Gentle on hands and skin
- Tough on dirt
- Pre-moistened, disposable, multi-purpose
- Convenient packaging allows for easy dispensing

USES

- At work – clean tools and equipment
- At home – kitchen, bathroom, BBQ, boat and countless other uses

QUICK REF GUIDE

Colour **White**
 Size **100 Wipes**
 Code **999614**



Big Bucket Tradie Wipes

Ready to use pre moistened towels

RLA Big Bucket Tradie Wipes are pre moisturised tear off towels designed for removing and wiping away tough grease, grime and dirt. RLA Big Bucket Tradie Wipes are formulated to quickly and effectively remove sealant, tar, dirt, grease, oil, adhesive, wax, paint and ink from tools and equipment. For use a work cleaning tools and equipment and at home, cleaning kitchen, bathroom, BBQ, boat and countless other uses.

ADVANTAGES

- Convenient, easy tear off towels
- Won't scratch or mark
- Gentle on hands and skin
- Tough on dirt
- Pre-moistened, disposable, multi-purpose
- Convenient packaging allows for easy dispensing

USES

- At work – clean tools and equipment
- At home – kitchen, bathroom, BBQ, boat and countless other uses

QUICK REF GUIDE

Colour **White**
 Size **500 Wipes**
 Code **999800**



Big Bucket Anti Bacterial Wipes

Ready to use pre moistened towels

RLA Big Bucket Anti Bacterial Wipes are pre-moisturised tear off towels designed for sanitising surfaces and kills 99% of germs. For use at work, on a wide range of surfaces including shared tools, shared surfaces and equipment. Also for use in the home sanitising kitchen, bathroom, bedroom, desks, countertops and countless other surfaces.

ADVANTAGES

- Kills 99% of germs
- Tough and strong wipes
- Convenient ready to use towels
- Pre moisturised and disposable
- No rinsing or drying off required
- Easily dispensable and re-sealable packaging.

USES

- At work – clean tools and equipment
- At home – kitchen, bathroom, BBQ, boat and countless other uses

QUICK REF GUIDE

Colour **White**
 Size **500 Wipes**
 Code **999801**



PLUMBING FOAM FILLERS



Foam fillers
Applicator guns

**TRADIES
TRUST**



Expanding Foam Filler

Polyurethane foam

Expanding Foam is an aerosol dispensed expanding polyurethane foam. It expands to fill uneven gaps and voids. It expands up to 30 times original volume. It cures in 8 hours & can be cut, sanded & painted once cured.

USES

- Walls
- Filling large gaps
- Rodent proof

ADVANTAGES

- Expands 30 times
- Sandabale
- Paintable

QUICK REF GUIDE

Colour	Beige
Area	Internal / External
Dry Time	8 Hours
Size-Code	290g - 620810 484g - 620820



Expanding Foam Filler Gun Grade

Fire Retarded B2 Expanding Polyurethane Foam

Foam Filler Fire Retarded Gun Grade B2 is a one part moisture curing self-expanding polyurethane foam supplied in aerosol cans. It is easy to install by using the specially designed gun applicator. It will expand to fill gaps of all dimensions and in most difficult locations

USES

- Walls
- Filling large gaps
- Rodent proof

ADVANTAGES

- Expands 45 times
- Sandabale
- Paintable

QUICK REF GUIDE

Colour	Beige
Area	Internal / External
Dry Time	8 Hours
Size-Code	750mL - 620865

Foam Filler Applicator Gun Code - 770503



FoamGrip PU Gun Grade

Gun applied, foaming polyurethane adhesive

A foaming polyurethane adhesive. Suitable for bonding a wide range of commonly used construction materials such as plasterboard, particle board flooring, timber, plywood, brick, block, concrete, AAC, CFC sheet, polystyrene, steel, some plastics & many other materials. Foamgrip PU helps reduce nail pull in sheets.

USES

- Walls
- AAC, CFC
- Rodent proof

ADVANTAGES

- Expands 30 times
- Sandabale
- Paintable

QUICK REF GUIDE

Colour	Beige
Area	Internal / External
Dry Time	8 Hours
Size-Code	Foam grip PU 750mL - 620876

Foam Filler Applicator Gun Code - 770503



Foam Filler Cleaner

Aerosol cleaner

Foam filler cleaner is an aerosol packed cleaner for use with the foam filler applicator tool. Cleans uncured PU foam from inside and outside the applicator gun.

USES

- Cleans gun grade
- Filling large gaps
- Rodent proof

ADVANTAGES


- Expands 30 times
- Sandabale
- Paintable

Size - Code

500ml - 620870



PLUMBING
PVC SOLVENT
CEMENTS
& PRIMERS

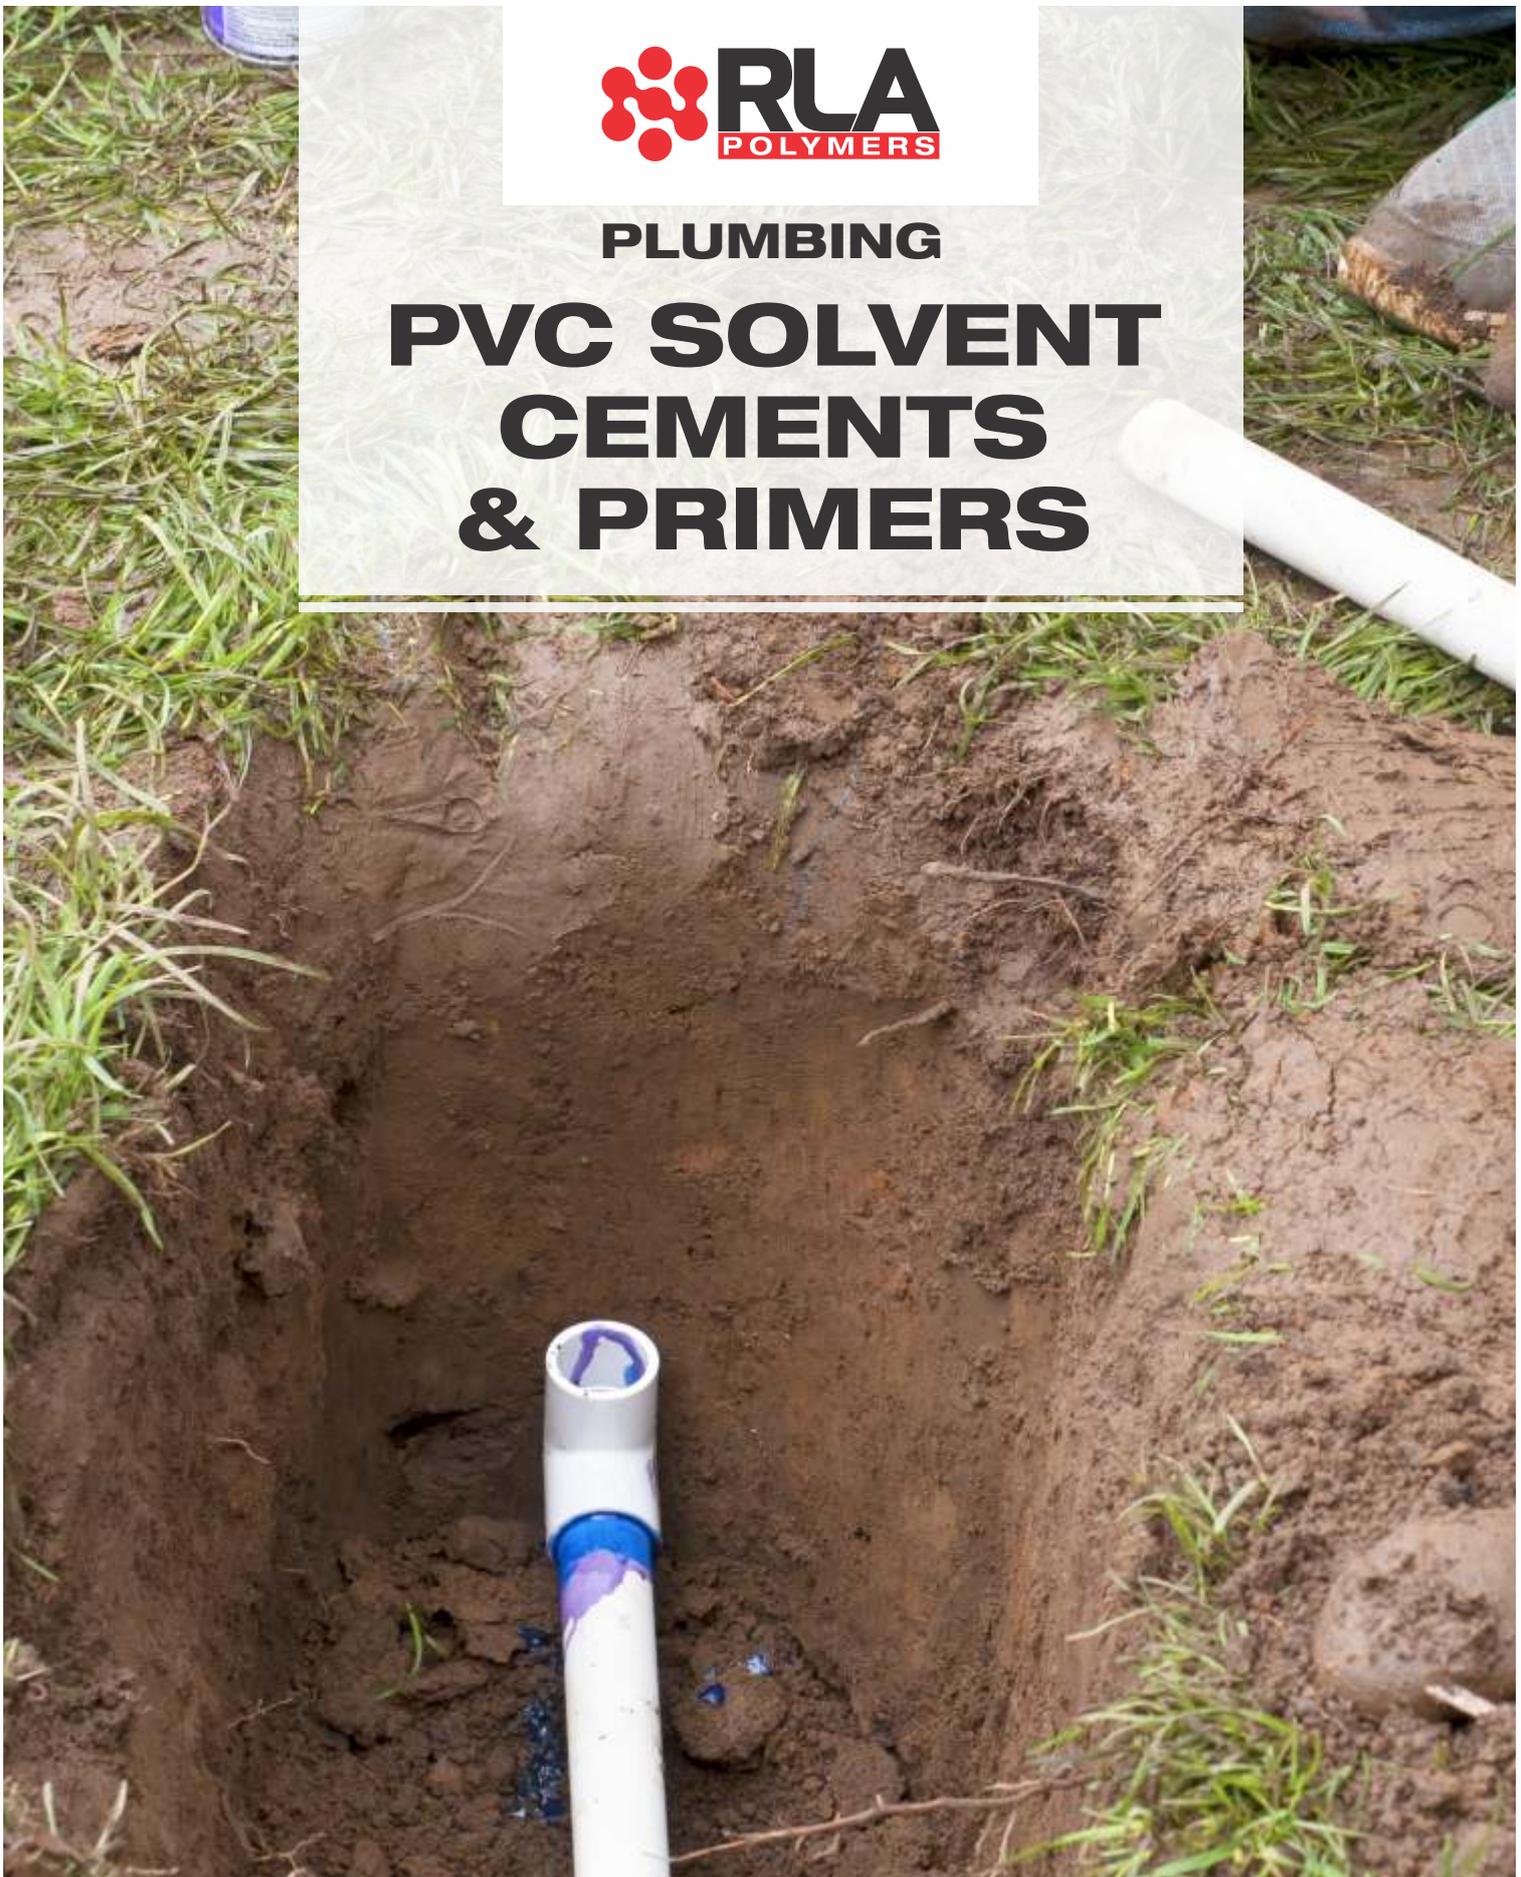

Solvent Cements
Priming Fluids

**TRADIES
TRUST**



PVC Priming Fluid

For use with PVC-U pipes and fittings

PVC Pipe Priming Fluid is a solvent based product which is specially formulated to clean and prime PVC-U pipes and fittings so they are free of dirt and grease. It is fast drying and leaves a pinkish stain to indicate where the PVC pipe has been correctly primed.

USES

- Priming PVC pipes

ADVANTAGES

- AS/NZS 3879 Approved
- AS/NZS 4020 Approved
- Australian Made

COLOUR | CODE

- Red 125mL - A5621
- Red 250mL - A5623
- Red 500mL - A5625
- Red 1 L - A5627
- Red 4 L - A5629
- Red 20 L - A5631
- Clear 250mL - A5633
- Clear 500mL - A5635
- Clear 4 L - A5637



Type N PVC PipeCement

For use with non pressure pipes.

RLA Type N Solvent Cement is designed as a high bond strength PVC pipe cement in all non pressure situations for either pipe work or sheet form PVC substrates.

Also available in: **Large Diameter** | **Gel** | **Slow Set**

USES

- Strong adhesive

ADVANTAGES

- AS/NZS 3879 Approved
- AS/NZS 4020 Approved
- Contact with drinking water
- Australian Made

COLOUR | CODE

- Blue 125mL - A5581
- Blue 250mL - A5583
- Blue 500mL - A5585
- Blue 1 L - A5587
- Blue 4 L - A5589
- Blue 20 L - A5591
- Blue Gel 500mL - A5638
- Slow Set 500mL - A5584
- Clear Low Vapour 250mL - A5639
- Clear 250mL - A5593
- Clear 500mL - A5595
- Clear 4 L - A5597
- Clear 20 L - A6134



Type P PVC PipeCement

For use with pressure pipes.

RLA Type P Solvent Cement is designed as a high bond strength PVC pipe cement in all pressure situations for either pipe work or sheet form PVC substrates.

USES

- Strong adhesive

ADVANTAGES

- AS/NZS 3879 Approved
- AS/NZS 4020 Approved
- Contact with drinking water
- Australian Made

COLOUR | CODE

- Green 125mL - A5599
- Green 250mL - A5605
- Green 500mL - A5607
- Green 1 L - A5609
- Green 4 L - A5611
- Green 20L - A5613
- Clear 500mL - A5615
- Clear 4 L - A5617
- Clear 20 L - A5619

ACCESSORIES



Plumbing EzyRoll and Dauber

COLOUR | CODE

- Ezy Roll Applicators Red 500mL - A6125 (10 Pack)
- Dauber Applicator Red 500mL - A6156 (10 Pack)
- Ezy Roll Applicators Blue 500mL - A6138 (10 Pack)
- Brushes Blue 500mL - A6155 (10 Pack)

RLA has been supplying the Australian plumbing market for over 30 years.



PVA ADHESIVES & ELECTRICAL



PVA and MDF Adhesive
Cable Lube
Epoxy

**TRADIES
TRUST**



PVA WoodGrip

Superior Performance PVA adhesive

Designed for high strength bonding for woodworking and general joinery applications. PVA Woodgrip is a low temperature film former and therefore eliminates chalking at low temperatures

USES

- Timber
- Joinery
- Internal

ADVANTAGES

- Superior strength
- Easy to use
- Fast drying

QUICK REF GUIDE

Colour	White
Area	Internal
Dry Time	12 Hours
Size & Code	250mL - 999570
	500mL - 999571
	1L - 999572
	4L - 999574
	20L - 999575



MDF Adhesive

High strength adhesive for medium density board

Specially formulated to provide good adhesion to medium density fibreboard

USES

- Joinery
- Cabinets
- Internal

ADVANTAGES

- Fast setting
- High bond strength
- Non hazardous

QUICK REF GUIDE

Colour	Pale Pink
Area	Internal
Dry Time	12 Hours
Size & Code	250mL - 999550
	500mL - 999580
	4L - 999581
	20L - 999582



CableLube

Code C cable pulling lubricant

Cable Lube is used to assist in the laying and pulling of cable into conduits under floors, under ground and more.

USES

- Suitable on all electrical conduit.
- Vertical and horizontal.
- Internal / External

ADVANTAGES

- Easy applicator bottle
- Water wash up
- Non-hazardous

Electrical

QUICK REF GUIDE

Colour	Light blue
Area	Internal /External
Size & Code	1L - A4401
	20L - A4403

Epoxy



MultiPurpose Epoxy

2 Part High Strength Adhesive

Multipurpose Epoxy Adhesive is a 2-part, non sag, high strength adhesive. It is intended for bonding of a variety of common building materials to vertical and horizontal surfaces.

ADVANTAGES

- Permanent bond 5 – 6 hours
- Non staining on all stone types
- Non sag up to 30 mm build
- Mix ratio 1:1
- Solvent free
- Permanent bond – no performance decrease over time
- High performance properties
- High tensile and compressive strength
- Excellent chemical resistance

USES

- Masonry, precast concrete, stone panels marble, granite, slate, ceramic tiles on walls or overhead in interior or exterior applications,
- Insitu formed concrete, Precast concrete, Grouting/fixing anchor bolts,
- Bonding to metals, Concrete structures, Fabrication of head stones and other decorative stone items,
- Statues and fountains, Pipe and crack repair.

QUICK REF GUIDE

Colour	Light grey
Area	Internal / External
Dry Time	50-60 Minutes
Size- Code	1L Kit - 14509
	4L Kit - 14504
	20L Kit - 14505





TIMBER PRESERVATIVES & HARDWARE PAINTS



Survey Paints
Timber Treatments
& Preservatives

**TRADIES
TRUST**

Survey Paint Spray Marker

Premium Marking Paint

Survey Paint Spray Marker. Quick drying, long lasting, highly durable spray marker used for writing and spot marking in a variety of applications. Colours available include:



Colour/Code Description

- ABA012 Survey Brilliant Red 350g
- ABA013 Survey Brilliant Yellow 350g
- ABA032 Survey Brilliant Red 350g
- ABA033 Survey Brilliant Blue 350g
- ABA207 Survey Brilliant White 350g
- ABA040 Survey Fluro Yellow 350g
- ABA043 Survey Fluro Pink 350g
- ABA200 Survey Fluro Green 350g
- ABA203 Survey Fluro Orange 350g

QUICK REF GUIDE

- Area **Internal/External**
- Dry Time **5 Minutes**
- Qty **12 x Aerosol Cans**
- Size **350gm**

ADVANTAGES

- U.V Resistant
- Fast Drying
- Excellent Colour
- Long lasting

USES

- Concrete
- Bitumen
- Grass
- Gravel
- Dirt
- Timber

New look. Same Great Product

Premuim Survey Marking Paint



- TIMBER**
- BITUMEN**
- CONCRETE**
- GRASS / SOIL**
- STEEL**





Ecoséal

Treatment for cut timber ends

Woodcare Ecoséal is an aerosol spray for the reinstatement of the treatment envelope of re-worked treated pine on timber up to H5. Above ground only

Above ground only.

ADVANTAGES

- Protects cut timber
- Allows you to keep your warranty on timber
- Easy to use
- Fast drying

USES

- H3 timber
- H4 timber
- Cuts on treated timber

QUICK REF GUIDE

Colour	Green
Area	Above ground
Size- Code	300gm - 999705



Enseal

Clear treatment for cut timber ends

Woodcare Enseal Clear is an aerosol spray for the reinstatement of the treatment envelope of re-worked treated pine on timber up to H3. Above ground only

Above ground only.

ADVANTAGES

- Protects cut timber
- Allows you to keep your warranty on timber
- Easy to use
- Fast drying

USES

- H2 timber
- H3 timber
- Cuts on treated timber

QUICK REF GUIDE

Colour	Clear
Area	Above ground
Size- Code	300gm - 999704



Endcheck

Wax emulsion timber sealer

Woodcare Endcheck is a wax based emulsion for the coating of log ends and sawn timber to reduce the moisture loss and resultant splitting.

ADVANTAGES

- Prevents splitting
- Restricts moisture loss
- Dries to wax coating
- Suitable spray apparatus

USES

- Logs
- Sawn timber

QUICK REF GUIDE

Size	20LT - 174050
	200LT - 174055

Don't take short cuts...Treat your end cuts!
Ensure your timber remains treated & protected

All treated timber that is cut, notched or drilled needs to be retreated to ensure the longevity of the timber and ensure the warranty of your timber.





Landscaping and **GARDEN**



Binders
and
Paving sands

**TRADIES
TRUST**



GardenLock

Water based binding agent for stones and wood chips

For binding both landscaping and decorative stones in garden beds, pot plants & tree surrounds. Whilst still allowing for water penetration & keeping moisture in the soil. GardenLock binder assists in reducing ongoing maintenance in non traffic areas & enhances the appearance of tones. It is touch dry after 1 hour & fully cures in 48 hours.

ADVANTAGES

- Keeps stones in position
- Allows water flow
- 1 Hour touch dry
- Art & craft application
- UV Stable

USES

- Tree surroundings
- Garden beads
- Pot plants

QUICK REF GUIDE

Colour	Dries clear
Dry time	24Hrs full cure
Size- Code	500mL - A6030
	1L - A6031
	4L - A6034
	20L - A6035



PavingSand

Jointing material for clay and masonry pavers

PavingSand is a joint filler designed for paving. It has been specially formulated using a specialised blend of washed sand and additives to allow rapid filling of all paving joints.

ADVANTAGES

- Perfect joint filler designed to lock pavers together.
- Multiple uses, footpaths, driveways and sloping paths
- Great for high wind areas

USES

- Foot Paths
- Drive ways
- Sloping sites
- In high wind areas
- Where mobile sweepers are used .

QUICK REF GUIDE

Colour	Neutral - RL7414-20
	Charcoal - RL7414CH-20
Size	20KG Bags

Garden lock allows you to keep your paths & garden stones and chips in place. To keep your garden looking immaculate, year round.





TILING



Tile adhesives
Grouts
Admixtures
Silicones

**TRADIES
TRUST**

ADHESION TYPE:

C

Cementitious adhesive

D

Dispersion adhesive

R

Reaction adhesive

ADHESION CAPACITY:

1Normal adhesives
Standard strength tile adhesive**2**Improved adhesives
Stronger tile adhesive

OPTIONAL CLASSES:

FFaster setting/drying adhesive
Quicker setting of the adhesive allowing for earlier grouting**T**Reduced slip adhesives
No slipping of wall tiles**E**Adhesives with extended open time
Once spread, the adhesive can be left without a tile being fixed for a longer time**S1**Deformable adhesives
For cementitious adhesives only**S2**Highly deformable adhesives
(for cementitious adhesives only)



TileBond Extra

Premium white cement based tile adhesive

TileBond Extra is a reliable white cement. It is excellent for rigid fixing requirements such as pavers and landscaping.

ADVANTAGES

- White cement based
- Low VOC
- 10 Year Guarantee

SUBSTRATES

- Concrete floors and walls
- Rendered brickwork, block work

QUICK REF GUIDE

Colour	White
Class	C1E
Area	Internal External
Uses	Wall Floor
Coverage	4-5m²
Dry Time	24 Hrs
Size- Code	20KG - RL7110-20



MoreFlex

Flexible, rubber modified tile adhesive

Moreflex is a rubber modified, flexible white cement based tile adhesive. It can be used internally or externally on wall and floor surfaces

ADVANTAGES

- Flexible
- White cement based
- Non lipping
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete
- Plasterboard
- Rendered brickwork, block work
- Fibre cement

QUICK REF GUIDE

Colour	White (or grey)
Class	C1S1ET
Area	Internal external
Uses	Wall Floor
Coverage	8-10m²
Dry Time	24 Hrs
Size- Code	20KG - RL7165-20 20KG Grey - RL7166-20



TileFlex

Premium grade rubber modified adhesive

TileFlex is a rubber modified flexible white tile adhesive, it is non slump and ideal for larges format tiles. It can be used for internal and external wall and floor applications.

ADVANTAGES

- Highly flexible
- White cement based
- Non slump
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC Sheet
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

Colour	White
Class	C2S1ET
Area	Internal External
Uses	Wall floor
Coverage	7-8M²
Dry Time	6-8 Hrs
Size- Code	20KG - RL7145-20



Mastik

Economical & flexible polymer modified adhesive

RLA Mastik is an economical, flexible polymer modified adhesive with great mastik properties for bonding most types of ceramic and porcelain tiles (with the exception of moisture sensitive stone and marbles). Ideal for large format tiles.

ADVANTAGES

- Flexible
- White cement based
- Non slump
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

Colour	White / Grey
Class	C2S1ET
Area	Internal External
Uses	Wall Floor
Coverage	7m²
Dry Time	24 Hrs
Size- Code	20KG White - RL7152-20 20KG Grey - RL7122-20



UniGrip

Premium grade polymer modified, highly flexible adhesive

Unigrip is non slip/non slump and ideal for large format tiles and can be used for fixing Porcelain and Vitrified tiles. Unigrip can be used to fix tiles over existing tiles and can be used to fix tiles over most waterproofing membranes. Unigrip can be used for fixing tiles in fully immersed situations like swimming pools and spas and can be used over some acoustic mats.

ADVANTAGES

- Highly Flexible
- Use in immersed situations
- Non slump / Non Slump
- Use over green screeds
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

Colour	White
Class	C2S2ET
Area	Internal External
Uses	Wall Floor
Coverage	6-7m²
Dry Time	24 Hrs
Size- Code	15KG - RL7153-15



OneFlex

Rubber filled, polymer modified tile adhesive

OneFlex is a premium grade flexible 1 part rubber modified off white tile adhesive for internal and external floor applications. It can be used over timber flooring boards.

ADVANTAGES

- Strong Bond
- Low VOC
- Highly flexible
- Good coverage
- For use over timber
- Fixing low porosity tiles

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- Timber floorboards
- RLA approved membranes

QUICK REF GUIDE

Colour	White
Class	C1S2ET
Area	Internal External
Uses	Wall Floor
Coverage	9m²
Dry Time	24 Hrs
Size- Code	20KG - RL7172-20



FastSet

Rapid setting tile adhesive

RLA Fast Set is a high quality and cost effective rapid setting, polymer modified, grey cement based tile adhesive. Ideal for use in situations where the adhesive must dry quickly or when grouting must be completed shortly after fixing of tiles.

ADVANTAGES

- Rapid setting:
3 Hours to Grout,
6 Hours Foot Traffic
- Polymer modified, Non-slump.
- Over Green Screed.

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

Colour	Grey
Class	C2S1FTE
Area	Internal External
Uses	Wall Floor
Coverage	5-6m²
Dry Time	6 Hrs
Size- Code	20KG - RL7132-20



StoneSet

Moisture sensitive stone adhesive

RLA Stone Set is a premium grade rapid setting, polymer modified, White cement based tile adhesive. Ideal for use in situations where the adhesive must dry quickly or when grouting must be completed shortly after fixing of tiles.

ADVANTAGES

- Rapid setting:
2 Hours to grout,
4 Hours foot traffic
- Polymer modified, non-slump.
- Can be used over green screed.

SUBSTRATES

- Class A Moisture sensitive tiles.
- Plasterboard
- Rendered brickwork, block work
- Concrete / FC Sheeting
- RLA approved membranes

QUICK REF GUIDE

Colour	White
Class	C2S1FTE
Area	Internal External
Uses	Wall Floor
Coverage	5-6m²
Dry Time	4 Hrs
Size- Code	20KG - RL7131-20

PolyMastic

Pre-mixed white acrylic tile adhesive

PolyMastic is an internal wall adhesive with superior non slump properties, specially designed for larger wall tiles. PolyMastic is a white acrylic based, flexible, premixed tile adhesive designed for bonding all types of porous ceramic, and mosaic tiles.

ADVANTAGES

- Easy to apply
- Non slip
- Low VOC
- 10 Year Guarantee

SUBSTRATES

- Fibre cement sheeting
- Plasterboard
- Rendered brickwork, block work

QUICK REF GUIDE

Colour	White
Class	D1E
Area	Internal
Uses	Wall
Coverage	7-10m²
Dry Time	4 Hrs
Size- Code	4LT - RL7194-4 15LT - RL7194-15





WATERPROOFING



Liquid & cementitious membranes.
Moisture barriers, primers & Sealers.
Tapes & bandages.

**TRADIES
TRUST**

WPU

Class III Internal / External Waterproofing membrane

RLA WPU is an elastomeric one part polyurethane/Acrylic fibre reinforced water based membrane developed as a high performance internal / external membrane for most general waterproofing applications. It is suitable to be applied in external applications where a UV stable occasional trafficable membrane is required.

ADVANTAGES

- Tough & Flexible
- Class III Membrane
- CSIRO certified external use
- UV Stable
- Excellent adhesion
- Fast drying

USES:

- Residential/commercial buildings
- Bathrooms, kitchens, laundries, balconies.
- Decks, roofs.
- Internal/External wet areas



QUICK REF GUIDE

Colour	Grey
Class	III
Area	Internal / External
Coverage	Wall: 0.5mm DFT Floor: 0.9mm DFT
Size- Code	4LT - 14443 15LT - 14442

WPM

Class III SBR Waterborne flexible under tile membrane

RLA WPM is a waterborne flexible waterproof membrane designed for use under tiled finishes that is capable of accommodating expected structural movement. RLA WPM is a certified Class III membrane and is compliant to AS4858:2004: "Wet Area Membranes", when applied in accordance to AS3740:2010 "waterproofing Wet Areas in Residential Buildings".

ADVANTAGES

- Permanently flexible
- Class III Membrane
- Quick drying
- Low VOC
- Excellent adhesion
- Fibre reinforced

USES:

- Residential/commercial buildings
- Bathrooms, kitchens, laundries, balconies.
- Shower recesses.
- Internal wet areas



QUICK REF GUIDE

Colour	Grey
Class	III
Area	Internal
Coverage	Wall: 0.5mm DFT Floor: 0.9mm DFT
Size- Code	15LT - 14510

Cementitious membranes

2Part

UV Stable cementitious 2 part waterproofing membrane

2Part is based on high alumina fast setting cements and is mixed with a high solids water resistant pure acrylic. It combines the fast drying and excellent adhesion characteristics of traditional 2 part membranes with the excellent toughness, elongation and flexibility of modern acrylic membranes.

ADVANTAGES

- Good elongation
- Tough membrane
- Excellent adhesion
- Flexible

USES:

- Under tile on balconies, roofs
- Swimming pools
- Internal/External under tile areas.



QUICK REF GUIDE

Colour	Off white
Class	II
Area	Internal / External
Coverage	16m² @ 2 coats, with a DFT of 1.2mm
Size- Code	20LT Part A 20Kg Part B RL7190-KIT

1Komponent

One Part, flexible, cementitious, fibre reinforced membrane

Specially formulated cementitious base incorporating graded aggregates and polymers, producing a highly flexible water proof membrane – capable of withstanding significant flexural strain. It is suitable for both positive and negative pressure – up to 25 metres (2.5 bars).

ADVANTAGES

- Apply by trowel for best results
- Can be applied by brush/roller
- Use on damp surfaces
- Versatile mixing ratio
- Excellent adhesion
- Flexible

USES:

- Under tile internal wet areas
- Under tile in external areas
- Concrete swimming pools
- Areas subject to hydrostatic pressure



QUICK REF GUIDE

Colour	Light Grey
Class	I
Area	Internal / External
Coverage	1.17 kg/m² per mm of thickness
Size- Code	20KG - 999729



Moisture Seal

Epoxy water vapour barrier

Moisture Seal is a high performance 2 part epoxy waterproofing system designed as a water and vapour proof coating under water proofing systems, coatings, tiles and Timber flooring. It is designed for floor and wall applications where durability, water, and chemical resistance are required.

ADVANTAGES

- Low VOC
- Withstands a head of Water Pressure up to 25 metres or 250Kpa
- Complies with AS 4020:2005 "Products in contact with drinking water"
- Complies with ASTM E96 Water vapor transmission
- Water based and user friendly

SUITABLE FOR USE:

- Primer for damp surfaces, scyon sheeting, membranes & more
- Areas where hydrostatic pressure is an issue.
- Sealing concrete slabs before vinyl and timber overlays
- Dust sealing for interior concrete floors
- Retaining Walls, Planter boxes, Concrete Tanks, Lift Wells
- Basements, Reservoirs, Aquaducts, Underground Carparks
- As a Basecoat coating in areas requiring seamless epoxy flooring

QUICK REF GUIDE

Mixing ratio	1:1 (component A:B)
Full cure	5-7 days@25°C & 50%RH
Dry film thickness	100 microns (approx.)
Wet film thickness	200 microns
Coverage	4-5m²/Litre
Size- Code	8LT Kit - 15636 20LT Kit - 15637



Fillet & Joint Seal

Tough, Elastic & water resistant sealant

RLA Fillet and Joint Seal is a grey fast curing, low modulus, sealant that cures from moisture in the air to form a tough, elastic and water resistant sealant prior to the application of RLA polyurethane and waterproofing membranes.

ADVANTAGES

- High durability
- Excellent weather resistance
- Non staining
- Fast cure.

USES:

- Fillet joints to Internal wet areas to AS3740
- Fillet Joints to External wet areas to AS4654
- Expansion & control joints to internal wet areas
- Static cracks & sheet joins in internal wet areas.

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Coverage	15mmx15mm fillet: 5.3m 20mmx20mm fillet: 3.0m
Size- Code	600ml SSG - 620529

Waterproof Tape

Non woven, polyester fabric for membranes

An open weave polyester reinforcing fabric for use of reinforcing RLA waterproofing membranes. Generally 2 Litres of waterproofing membrane per square metre of product is required to properly saturate and cover scrim tape.

ADVANTAGES

- Easy to apply giving additional strength
- Allows for greater product build up
- Eliminates sag of membrane on bond breakers

Accessories

Peel N' Stick Tape

Self stick reinforcing tape

RLA Peel N' Stick is a flexible membrane / reinforcing fabric combination designed to provide a simple yet excellent waterproofing solution and technique for joints, corners, cracks and gaps. Used in conjunction with waterproofing membranes, it provides the ultimate method in waterproofing and sealing joints, corners and cracks.

ADVANTAGES

- Has a tough, flexible and technically advanced waterproof backing.
- Highly deformable in both longitude and latitude
- Eliminates the need to reinforce the membrane over these areas.
- Gives greater protection than conventional methods of waterproofing.
- Provide double the waterproofing protection to critical areas.
- Aids in the prevention of slump in membranes over Bond-breakers

QUICK REF GUIDE

Colour	Off white / grey
Size- Code	80mmx15m - 730555

Size - Code

(100mm x 50m) - 730663
(200mm x 50m) - 730662



Flexiband Roll

Elastic joint band roll

Detailing system designed for waterproofing and sealing all types of joints, junctions and general areas subject to movement. Featuring the central flexible area the Flexiband roll can accommodate movement in longitudinal, lateral and transverse directions enabling high elongation, rupture resistance, and up to 100% elastic recovery.



ADVANTAGES

- One part - easy to apply
- High flexible and tough
- Long term protection
- Rupture, chemical & water resistant.

BOND BREAKER FOR:


- Wall/Floor junctions
- Substrate abutments
- Control joints
- Movement & expansion joints

SIZE - CODE

80mmx50m - 730694

Flexiband External Corner

Waterproofing external corners providing maximum protection at the most volatile areas, ensuring a quality watertight seal that accommodates movement in a variety of different waterproofing applications. Made from a unique grade of rubber, providing an elastic seal to line the wall / floor junction, forming a rupture resistant seal at corner intersections.



ADVANTAGES

- One part - easy to apply
- Pre-formed & heat welded
- Guarantee watertight assembly
- Rupture, chemical & water resistant.

BOND BREAKER FOR:


- External Wall/Floor junctions
- Substrate abutments
- Control joints
- Movement & expansion joints

SIZE - CODE

x25 - 730695

Flexiband Internal Corner

Waterproofing internal corners providing maximum protection at the most volatile areas, ensuring a quality watertight seal that accommodates movement in a variety of different waterproofing applications. Made from a unique grade of rubber, providing an elastic seal to line the wall / floor junction, forming a rupture resistant seal at corner intersections.



ADVANTAGES

- One part - easy to apply
- Pre-formed & heat welded
- Guarantee watertight assembly
- Rupture, chemical & water resistant.

BOND BREAKER FOR:


- Internal Wall/Floor junctions
- Substrate abutments
- Control joints
- Movement & expansion joints

SIZE - CODE

x25 - 730696

Flexiband Tap Sleeves

Tap Sleeve enhances the seal around penetrations such as pipes, drainage outlets, cabling and any surface fixtures by protecting against movement, vibration and cracking. It provides a permanent tight rubber seal against water ingress enabling penetrations to withstand a variety of movement conditions without compromising the membrane seal.



ADVANTAGES

- Ensures an elastic seal at pipe penetrations
- Waterproof and a vapour barrier
- Long term sealing protection at volatile areas
- High Strength with excellent tear resistance
- Can be cut on site

SUITABLE FOR USE:

- Pipe penetrations
- Volatile areas needing protection

SIZE - CODE

x25 - 730697



GROUT RANGE



Coloured grouts.
Epoxy grouts.
Sanded grouts

**TRADIES
TRUST**



Smooth White Grout

Unsanded white cement based grout

Smooth white grout is an unsanded smooth white cement based grout. It is designed for use with most types of ceramic, mosaic and natural stone tiles. It can be used on internal wall joints only. It can be used in grout joints from 1- 3mm wide.

ADVANTAGES

- Mould resistant
- 1-3mm joints

SUBSTRATES

- Ceramic and mosaic tiles

QUICK REF GUIDE

Colour	White
Class	CG1
Area	Internal
Uses	Wall
Size- Code	2.5KG - RL9614W-2.5 10KG - RL9614W-10 20KG - RL9614W-20



Coloured Grout

High performance efflorescence grout

RLA Coloured Grout is a high performance stain & efflorescence resistant grout. It is designed for use with most types of Ceramic, Mosaic, Natural Stone and Glass Tiles. It can be used on internal & external wall and floor surfaces, and used in grout joints from 1 -15mm wide.

ADVANTAGES

- Mould resistant
- 1-15mm joints
- Efflorescence resistant
- Superior coverage

SUBSTRATES

- Ceramic and mosaic tiles
- Natural stone & glass tiles

QUICK REF GUIDE

Colour	14 Colours
Class	CG1
Area	Internal external
Uses	Wall floor
Coverage	Refer calculator
Dry Time	24 Hours

ARCTIC
ANTIQUE WHITE
BEIGE
BUFF
SANDSTONE
LIGHT GREY
SILVER GREY

MID GREY
SLATE
CHARCOAL
MOCHA
CAPPUCCINO
CHOCOLATE
BLACK

Size	Colour	Code
2KG	Mid Grey	RL9650W-2
10KG	Mid Grey	RL9650W-10
2KG	Light Grey	RL9651W-2
10KG	Light Grey	RL9651W-10
2KG	Silver Grey	RL9652W-2
10KG	Silver Grey	RL9652W-10
2KG	Slate Grey	RL9653W-2
10KG	Slate Grey	RL9653W-10
2KG	Charcoal	RL9654W-2
10KG	Charcoal	RL9654W-10
2KG	Black	RL9655W-2
10KG	Black	RL9655W-10
2KG	Arctic	RL9656W-2
10KG	Arctic	RL9656W-10

Size	Colour	Code
2KG	Antique White	RL9657W-2
10KG	Antique White	RL9657W-10
2KG	Sandstone	RL9658W-2
10KG	Sandstone	RL9658W-10
2KG	Buff	RL9659W-2
10KG	Buff	RL9659W-10
2KG	Beige	RL9660W-2
10KG	Beige	RL9660W-10
2KG	Cappuccino	RL9661W-2
10KG	Cappuccino	RL9661W-10
2KG	Mocha	RL9662W-2
10KG	Mocha	RL9662W-10
2KG	Chocolate	RL9663W-2
10KG	Chocolate	RL9663W-10

* Colours are indicative only



Epoxy Grout

2 Component, epoxy grout

Two-part anti-acid epoxy mortar. Once mixed together, the two parts form a creamy mixture with excellent smoothness, which is also suitable for vertical no-slip application. Once hardened, the product is ultra high-performing in term of mechanical and chemical resistance. Grouting joints 1-15mm.

ADVANTAGES

- Easy to clean & use
- Flexible
- No Efflorescence or staining

SUBSTRATES

- Ceramic and mosaic tiles
- Surfaces exposed to aggressive chemicals.

QUICK REF GUIDE

Colour	4 colours
Area	Internal external
Uses	Wall floor
Coverage	Refer calculator
Dry Time	24 Hours
Size	5KG kits

ARCTIC
MID GREY

SLATE
CHARCOAL

Size	Colour	Code
5KG	Arctic	620400
5KG	Mid Grey	620401
5KG	Slate Grey	620402
5KG	Charcoal	620403

* Colours are indicative only



Sanded Grout

Unsanded cement based grout

RLA Sanded Grout is a cement based grout. It is designed for use with most types of Ceramic, Mosaic, and Natural Stone tiles. It can be used on internal & external floor joints. It can be used in grout joints from 5-12mm wide. It contains a biocide therefore making it mould resistant and can be applied in wet areas such as bathrooms and shower floors.

ADVANTAGES

- Mould resistant
- 5-12mm joints

SUBSTRATES

- Ceramic, mosaic & natural stone tiles

MID GREY
SLATE
BLACK

Size	Colour	Code
20KG	Mid Grey	RL7220-20
20KG	Slate Grey	RL7222-20
20KG	Charcoal	RL7221-20

* Colours are indicative only

QUICK REF GUIDE

Colour	3 colours
Area	Internal / External
Uses	Floor



EpoxyWash

Epoxy and adhesive resin cleaner

Epoxy Wash aggressively cleans off epoxy and grout residues that can stain tile surfaces. Epoxy Wash is suitable for use over coloured grout joints. It is a strong acid with no fumes and is a water based industrial grade detergent. Epoxy wash is for interior/external use, on walls and floors.

SUITABLE RESIDUES:

- Epoxy Grout
- Grout Resins

SUBSTRATES

- Ceramic & Mosaic Tiles
- Concrete
- Plaster
- Sinks & Tubs
- Metal Fittings

QUICK REF GUIDE

Colour	White
Area	Internal External
Used	Wall Floor
Size	1L - 508100 5L - 508101





TILING PRIMERS ADDITIVES

Primers
Additives
Admixtures

**TRADIES
TRUST**



UniPrime

Acrylic based primer

RLA Uniprime is an acrylic based universal wall / floor primer for use on porous surfaces prior to the application of RLA tile adhesives. Uniprime increases the adhesion of tile adhesives onto the substrate. Uniprime can be applied a variety of common building substrates.

ADVANTAGES

- Internal / External
- Floors / Walls
- Waterbased

SUBSTRATES

- Porous concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work

QUICK REF GUIDE

Colour	Blue
Uses	Wall / Floor
Coverage	8-10m² per litre
Dry Time	30 Minutes
Size- Code	1L - RL7170-1 5L - RL7170-5 20L - RL7170-20



Universal Primer

Water based acrylic primer

RLA Universal Primer is a rapid drying, solvent free, low VOC, water based acrylic primer. For use over porous and non porous substrates such as existing tiles, old paint (with the exception of oil based paints), vinyl adhesive, vinyl tiles, carpet adhesive residue, metal surfaces, sealed or burnished concrete floors.

ADVANTAGES

- Rapid drying
- Low voc
- Can be diluted
(for porous surfaces only
- Porous /Non porous substrates

SUBSTRATES

- Cement based tile adhesive residue
- Concrete, grout, screed, render
- Concrete
- FC Sheet

QUICK REF GUIDE

Colour	Green
Area	Internal External
Uses	Wall floor
Coverage	7-10m² per litre
Dry Time	30 - 60 Minutes
Size- Code	1L - RL7167-1 5L - RL7167-5 20L - RL7167-20



UniFlex

Additive

Uniflex is a white, high solids, flexible acrylic additive. It can be used internally or externally on wall and floor surfaces. Uniflex when mixed with RLA cement based adhesives can be used to bond tiles over concrete, render, rendered brickwork, blockwork.

ADVANTAGES

- Grout additive for RLA grout range
- Adhesive booster for cement based tile adhesives
- Adhesive booster for pool tiling
- Additive for sand/cement screeds

SUBSTRATES

- Cement based tile adhesives
- Grouts, screed, render
- Concrete / FC sheeting
- Plasterboard

QUICK REF GUIDE

Colour	White
Area	Internal External
Coverage	Refer TDS Application Dependant
Size- Code	1L - RL7180-1 5L - RL7180-5 20L - RL7180-20



QuickSet

Liquid additive cement accelerator

Quick Set will accelerate the curing of any product that is based on Portland Cement. Quick Set is most effective in cold temperatures (5 to 15 degrees C). Quick Set will work differently depending on the nature of the product and the exact performance can only be established by trialing.

ADVANTAGES

- Fast drying
- Liquid additive
- Achieve initial strength
- Easy to use

MIX WITH

- Portland Cement Adhesives
- Cement grouts
- Renders and screeds
- RLA Mastik, MoreFlex, AddFlextra etc

QUICK REF GUIDE

Colour	Blue
Area	Internal External
Size- Cde	5L - RL7610-5



TILE AND STONE SILICONE



Silicone
Caulking guns

**TRADIES
TRUST**



Available in
8 popular
colours

* Colours are indicative only



Tile and Stone Silicone Sealant

High performance sealant for tiling applications

An anti-fungal, non-diluted, high performance, UV resistant neutral cure silicone sealant. Designed for sealing joints or seams in ceramics, plaster, metal and timber [natural or painted] in wet areas. Kitchens, bathrooms, laundries, toilets and wherever fungal growth might occur.

ADVANTAGES

- Fast curing
- UV Stable
- Mould resistant
- ± 25% flexible
- Neutral curing

USES

- Perimeter sealing of baths, basins, shower basins, spas and sinks.
- Ceramic and other tiles & natural stones
- Window frames.
- Exhaust fans.
- Metal fixtures including shower frames.

QUICK REF GUIDE

Area	Internal External
Uses	Wall Floor
Coverage	5mmx5mm = 13m
Dry Time	30min Touch Dry
Size	300mL
Colours	White - 610435
	Mid Grey - 610437
	Slate - 610438
	Light Grey - 610436
	Charcoal - 610439
	Cappuccino - 610442
	Black - 610440
	Beige - 610441



Caulking Gun

Heavy duty skeleton caulking gun

Steel skeleton frame. For easy application of sealant or adhesives around corners without having to stop or reposition the nozzle. Handle combines plunger and release clip.

ADVANTAGES

- Steel skeleton frame
- Handle with plunger & release clip
- Rotating barrel enables continuous application round tight corners
- For application of sealants & adhesives

QUICK REF GUIDE

Colour	Black w/ Orange trim
Size Code	300ML CTG - A1380
	850ML CTG - 770502



TruLevel **LEVELLING & SCREEDS**

Cementitious

**TRADIES
TRUST**



TruLevel EconoScreed Rapid

Rapid setting & hardening, high early strength screed.

EconoScreed Rapid is a rapid hardening and drying, high early strength, slump-free and shrinkage compensated screed for flooring.

ADVANTAGES

- Light traffic in 2 hrs
- Up to 200mm
- Shrinkage compensated
- Excellent adhesion

COMPRESSIVE STRENGTH Mpa


1 Day	>30
7 Days	>50
28 Days	>65

FLEXURAL STRENGTH Mpa

1 Day	>5
7 Days	>8
28 Days	>10

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Coverage	2m² at 5mm
Dry Time	2 Hours
Size- Code	20KG - RL7187-20

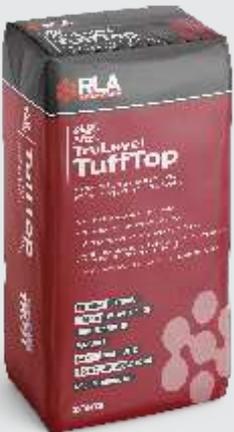

TruLevel TuffTop

Heavy duty, high performance internal/ external self levelling cementitious overlay

Tuff Top is rapid drying self-levelling compound with excellent flow properties on new or existing internal/external

ADVANTAGES

- Timber and concrete
- 5 to 30mm
- Shrinkage compensated
- Excellent adhesion

COMPRESSIVE STRENGTH Mpa


1 Day	>10
7 Days	>35
28 Days	>43

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>6
28 Days	>8

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Coverage	4m² at 3mm
Dry Time	3 Hours
Size- Code	20KG - 430090

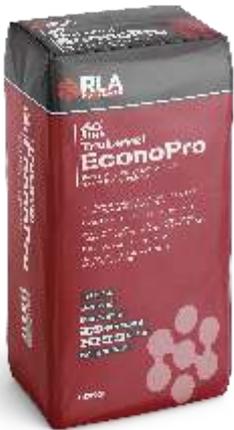

TruLevel Econopro

Self-smoothing general purpose cementitious underlay

Tru Level Econo Pro is a specially formulated floor levelling compound designed to achieve a smooth flat surface for application of internal carpet, tiles, vinyl and floating floor systems.

ADVANTAGES

- Excellent flow
- 2-30mm per application
- Large areas
- Eliminate sand screeds

COMPRESSIVE STRENGTH Mpa

1 Day	>10
7 Days	>25
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>8
28 Days	>9.5

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	2.4m² at 5mm
Dry Time	3-4 Hrs
Size- Code	20KG - 430074



TruLevel FineFinish

Smooth finishing cement based compound

Tru Level Fine Finish is polymer cement based smoothing compound used to provide a smooth finish to a variety of internal surfaces prior to the application of floor coverings such as vinyl, ceramic tiles, carpet and marble tiles.

ADVANTAGES

- No priming
- Skimcoat finish
- Floorcoverings 15min
- Excellent adhesion

COMPRESSIVE STRENGTH Mpa

1 Day	>25
7 Days	>32
28 Days	>45

FLEXURAL STRENGTH Mpa

1 Day	>5
7 Days	>8
28 Days	>10

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	10m² at 1mm (5Kg)
Dry Time	45 min
Size- Code	10KG - 206067



CONSTRUCTION GROUTS



Cementitious
Epoxy
Epoxy Anchors

**TRADIES
TRUST**



PenaFlow PanelGrout

General purpose non shrink Class A Cementitious grout

Penaflow Panel Grout is a Class A construction grout based on a blend of Portland cement, high quality graded aggregates and additives, which control expansion whilst the grout is in a plastic state..

ADVANTAGES

- Anchor bolt filling
- 20 to 150mm
- Block work filling
- Shrinkage compensated

COMPRESSIVE STRENGTH Mpa

1 Day	>20
7 Days	>35
28 Days	>55

FLEXURAL STRENGTH Mpa

1 Day	>1.5
7 Days	>8.5
28 Days	>9.5

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20Kg
Dry Time	3-4 Hours
Size- Code	20KG - 204039



PenaFlow GP Grout

General purpose, high performance non shrink, class A cementitious grout

Class A construction grout based on a blend of Portland cement, high quality graded aggregates and additives, which control expansion whilst the grout is in a plastic state.

ADVANTAGES

- Dam Walls
- Anchor bolt filling
- Displaces water
- Durable

COMPRESSIVE STRENGTH Mpa

1 Day	>32
7 Days	>50
28 Days	>70

FLEXURAL STRENGTH Mpa

1 Day	>4.3
7 Days	>8.5
28 Days	>9.8

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20Kg
Dry Time	3-4 Hours
Size- Code	20KG - 206060



PenaTech HES Grout

High early strength Class C, Fast setting , non shrink construction grout

Penatech HES Grout is a high early strength gain, flowable, shrinkage compensated, Class C grout for use where rapid strength gain is required.

ADVANTAGES

- Bridge bearing panels
- Heavy Duty
- High early strength
- Balustrades

COMPRESSIVE STRENGTH Mpa

1 Day	>60
7 Days	>75
28 Days	>85

FLEXURAL STRENGTH Mpa

1 Day	>5.3
7 Days	>8.8
28 Days	>9.8

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20Kg
Dry Time	20-30 Minutes
Size- Code	20KG - 205047



PenaTech HS Grout

High strength Class C, cementitious grout

Penatech HS Grout is a high strength, precision Class C grout. Non shrink dual expansion compensates for shrinkage in both the plastic and hardened state.

ADVANTAGES

- High early strength
- High ultimate strength
- Can be dry packed

COMPRESSIVE STRENGTH Mpa

1 Day	>35
7 Days	>75
28 Days	>85

FLEXURAL STRENGTH Mpa


1 Day	>3.9
7 Days	>7.0
28 Days	>9.5

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20Kg
Dry Time	3-4 Hours
Size- Code	20KG - 206051



ADMIXTURES

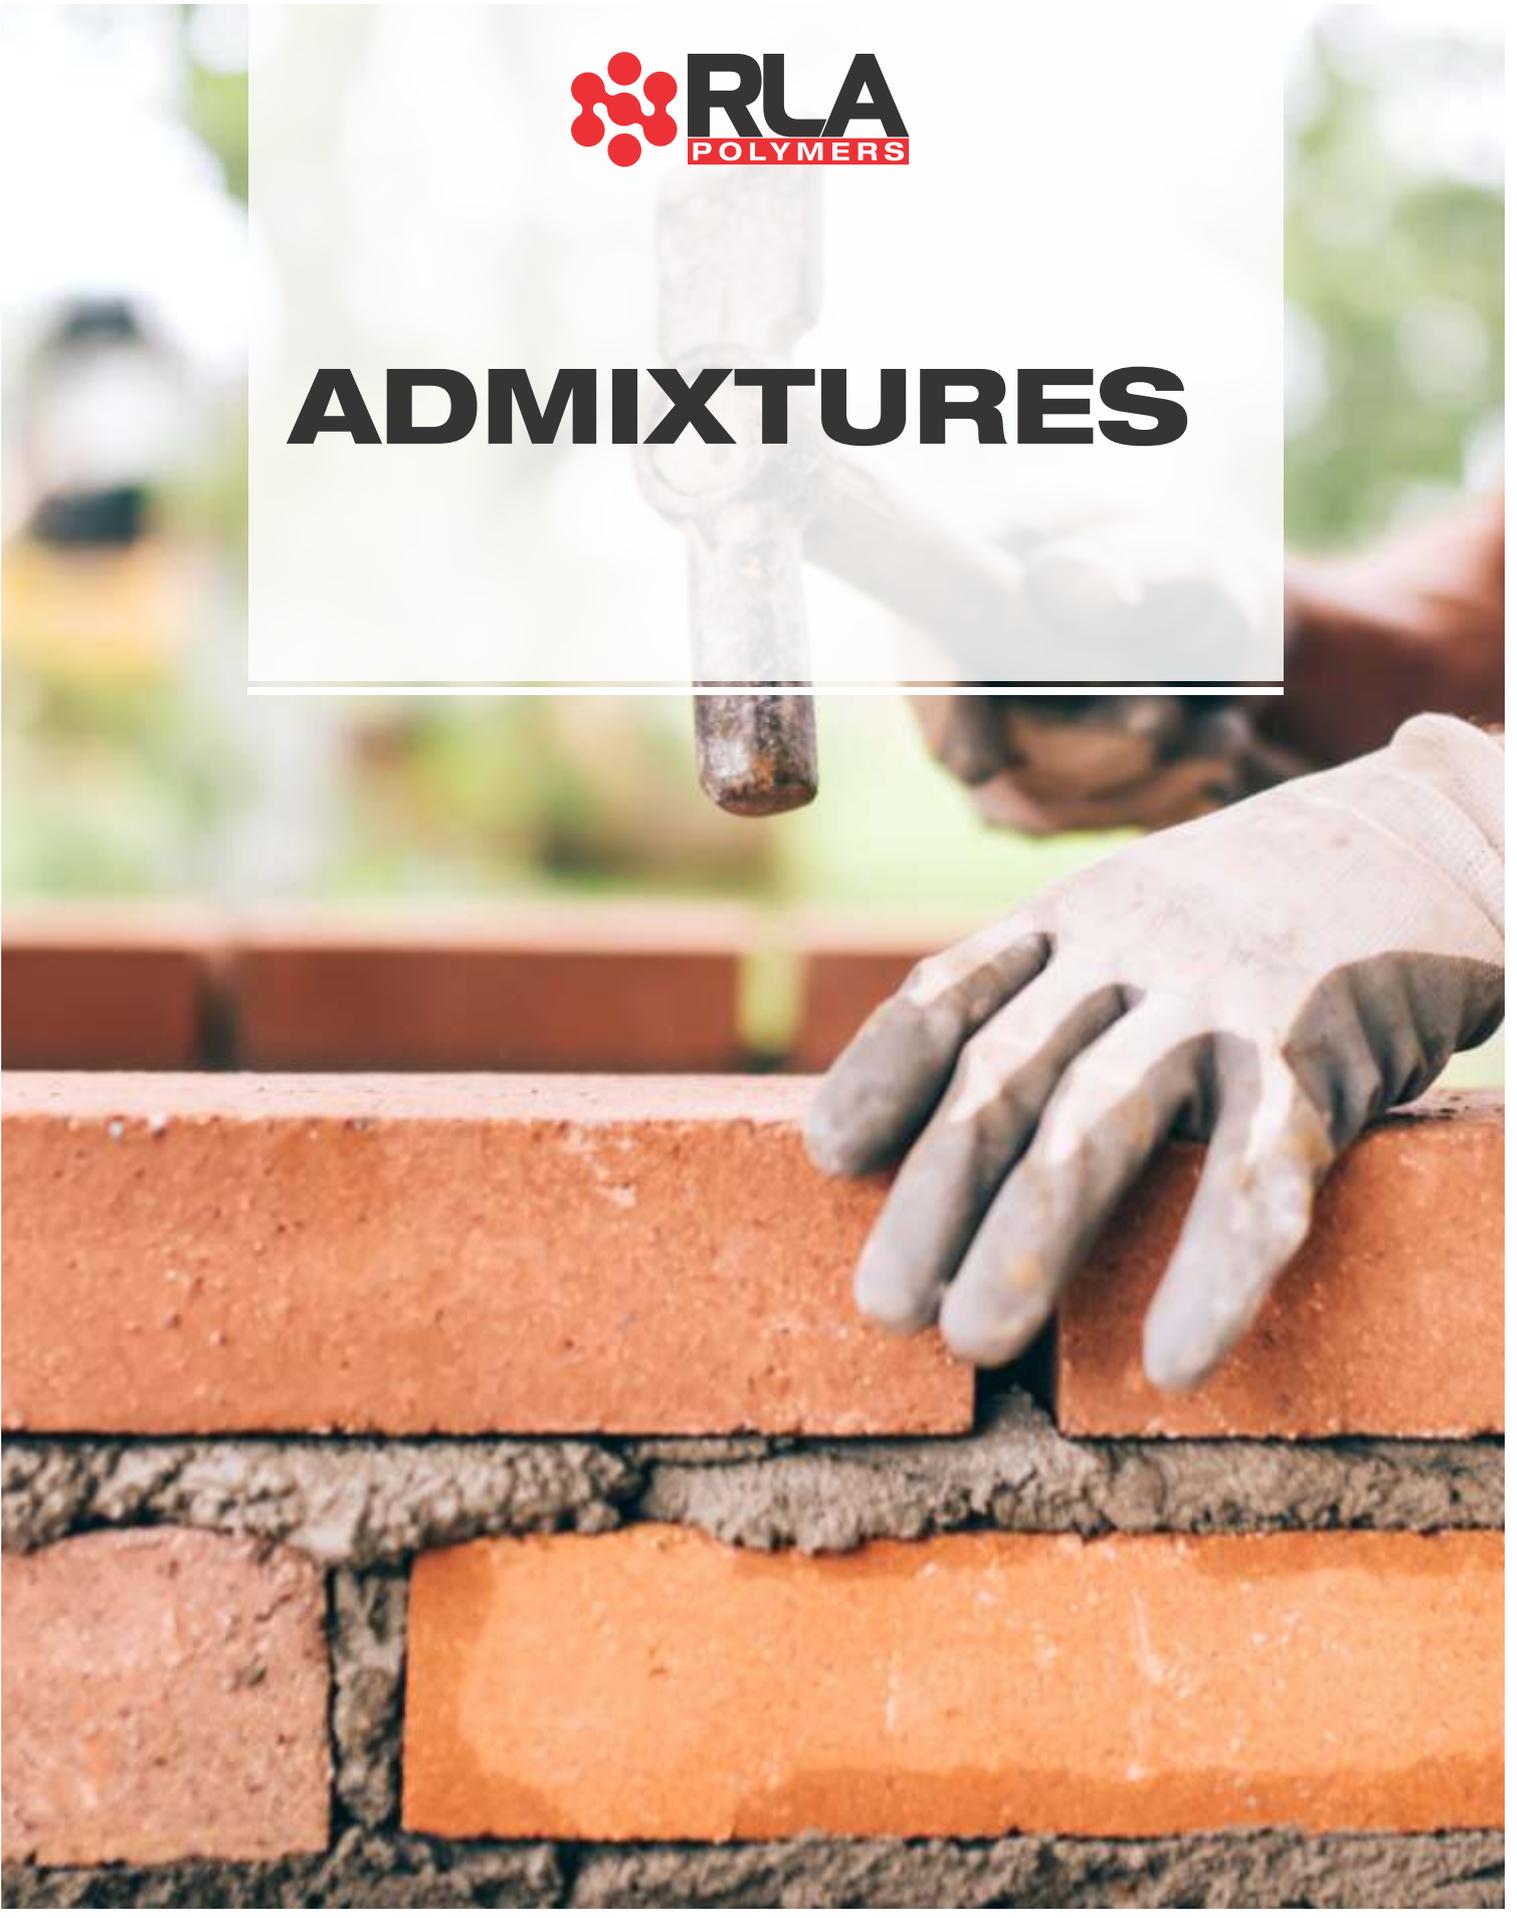

Admixtures

**TRADIES
TRUST**



B.M.P.

Brick Mortar Plasticiser

B.M.P. is used in Portland cement based mortar applications to obtain improved workability, cohesion, uniformity. Water retention and ease of placement. B.M.P. is also used for improved resistance to freeze/thaw conditions. B.M.P. is suitable for all types or mortars

ADVANTAGES

- Suitable for light coloured mortars
- Improves workability
- Reduces segregation and bleeding
- Improves frost resistance

USES

- Mortar additive to improve workability

QUICK REF GUIDE

Colour	Dark brown liquid
Area	Internal / External
Size- Code	5L - 100002
	20L - 100001



CreteBond

Premium water based polymer

CreteBond is a versatile polymer emulsion used for a wide range of applications in general construction and around the home.

ADVANTAGES

- High solids polymer
- High bond strength
- Water based

USES

- Bonding new to old concrete
- Bonding render and hard plaster
- Sealing internal concrete and masonry surfaces
- Admixture for improving the properties of mortar, render and concrete

QUICK REF GUIDE

Colour	White liquid
Area	Internal / External
Size- Code	1L - 322032
	2L - 322033
	5L - 322031
	20L - 322030



Mortarlox

Concentrated Mortar Plasticiser

Mortarlox is used in Portland cement based mortar applications to obtain improved workability, cohesion, uniformity, water retention and ease of placement.

ADVANTAGES

- Suitable for light coloured mortars
- Concentrated formula
- Reduces segregation and bleeding
- Improves frost resistance

USES

- Mortar additive to improve workability

QUICK REF GUIDE

Colour	Dark brown liquid
Area	Internal / External
Size- Code	5L - 103011
	20L - 103010



No.2 Paste

Paste Water Resisting Admixture

Integral water resisting admixture for concrete and masonry, above or below ground. Recommended for use where coloured mortar or integral floor colours are used.

ADVANTAGES

- Lines the pores in the matrix to prevent water passage through the mortar.
- Improves durability and workability.
- Suitable for after trades.
- Recommended for use where coloured mortar or integral floor colours are used.

USES

- Additive to mortars reducing porosity
- Produces water resistant mortars

QUICK REF GUIDE

Colour	White paste
Area	Internal / External
Size- Code	5L - 110352
	20L - 110350



Waterproofer

Water Resisting Admixture

Integral water resisting admixture for concrete and masonry, above or below ground. Recommended for use where coloured mortar or integral floor colours are used.

ADVANTAGES

- Water Based formula – safe to use.
- Economical solution.
- Improved mix workability.
- Improved durability.
- Suitable for most after trades.

USES

- Improves water resistance.
- Reduce porosity of mortar mix.

QUICK REF GUIDE

Colour	White liquid
Area	Internal / External
Size- Code	5L - 600222
	20L - 600231



TRADE TRUSTED ADVICE

The MyRLA app gives you instant access to a nationwide technical & sales force, at your fingertips. To help with project advice, product selection and job support.



MyRLA APP

Project & Product Advice
Usage calculators
Specification services
Data Sheet Downloads
Weekly prizes
& more

T. 1800 242 931

VIC

215 Colchester Rd
(PO Box 147)
Kilsyth VIC 3137

NSW

5A 246 Miller Road
Villawood
NSW 2163

QLD

57 Fulcrum Street
Richlands
QLD 4077

WA

24 Hanwell Way
Bassendean,
WA 6054

SA

30/32 Park Ave,
Woodville North
SA 5011

www.rlapolymers.com.au